

Type : **L-T5 WF**

Characters:

Epoxy Lens Color:Water Clear.Frosted.


Color: Red. Green. Blue. Amber. White.

Dia & Length: **Base:**

T5*19mm. W2*4.6d

Bulb Shape : **For:**

Flat Indicator.Instrument

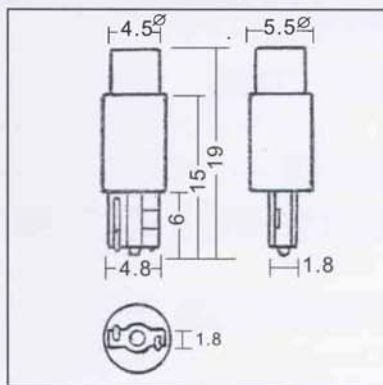

Part Number and Description

Part Number	Diameter Length	Color	Volts	Base	Design Current (mA)	Wave length(nm)	Lumens (M.c.d)	Life time(h)	Viewing Angle
LT5W-RF-01D	T5*19mm	Red	DC 6V	W2*4.6d	16 ± 2mA	620-630	0.7lm	30K(h)	90°
LT5W-RF-02D	T5*19mm	Red	DC 12V	W2*4.6d	16 ± 2mA	620-630	0.7lm	30K(h)	90°
LT5W-RF-02D1	T5*19mm	Red	DC 14V	W2*4.6d	17 ± 2mA	620-630	0.8lm	30K(h)	90°
LT5W-RF-03D	T5*19mm	Red	DC 24V	W2*4.6d	16 ± 2mA	620-630	0.7lm	30K(h)	90°
LT5W-RF-04D	T5*19mm	Red	DC 28V	W2*4.6d	17 ± 2mA	620-630	0.8lm	30K(h)	90°
LT5W-GF-01D	T5*19mm	Green	DC 6V	W2*4.6d	16 ± 2mA	515-525	1.8lm	30K(h)	90°
LT5W-GF-02D	T5*19mm	Green	DC 12V	W2*4.6d	16 ± 2mA	515-525	1.8lm	30K(h)	90°
LT5W-GF-02D1	T5*19mm	Green	DC 14V	W2*4.6d	17 ± 2mA	515-525	1.9lm	30K(h)	90°
LT5W-GF-03D	T5*19mm	Green	DC 24V	W2*4.6d	16 ± 2mA	515-525	1.8lm	30K(h)	90°
LT5W-GF-04D	T5*19mm	Green	DC 28V	W2*4.6d	17 ± 2mA	515-525	1.9lm	30K(h)	90°
LT5W-BF-01D	T5*19mm	Blue	DC 6V	W2*4.6d	16 ± 2mA	465-475	0.3lm	30K(h)	90°
LT5W-BF-02D	T5*19mm	Blue	DC 12V	W2*4.6d	16 ± 2mA	465-475	0.3lm	30K(h)	90°
LT5W-BF-02D1	T5*19mm	Blue	DC 14V	W2*4.6d	17 ± 2mA	465-475	0.3lm	30K(h)	90°
LT5W-BF-03D	T5*19mm	Blue	DC 24V	W2*4.6d	16 ± 2mA	465-475	0.3lm	30K(h)	90°
LT5W-BF-04D	T5*19mm	Blue	DC 28V	W2*4.6d	17 ± 2mA	465-475	0.4lm	30K(h)	90°
LT5W-AF-01D	T5*19mm	Amber	DC 6V	W2*4.6d	16 ± 2mA	590-600	0.4lm	30K(h)	90°
LT5W-AF-02D	T5*19mm	Amber	DC 12V	W2*4.6d	16 ± 2mA	590-600	0.4lm	30K(h)	90°
LT5W-AF-02D1	T5*19mm	Amber	DC 14V	W2*4.6d	17 ± 2mA	590-600	0.4lm	30K(h)	90°
LT5W-AF-03D	T5*19mm	Amber	DC 24V	W2*4.6d	16 ± 2mA	590-600	0.4lm	30K(h)	90°
LT5W-AF-04D	T5*19mm	Amber	DC 28V	W2*4.6d	17 ± 2mA	590-600	0.4lm	30K(h)	90°
LT5W-WF-01D	T5*19mm	White	DC 6V	W2*4.6d	16 ± 2mA	(K)5000-6000	1.9lm	30K(h)	90°
LT5W-WF-02D	T5*19mm	White	DC 12V	W2*4.6d	16 ± 2mA	(K)5000-6000	1.9lm	30K(h)	90°
LT5W-WF-02D1	T5*19mm	White	DC 14V	W2*4.6d	17 ± 2mA	(K)5000-6000	2.0lm	30K(h)	90°
LT5W-WF-03D	T5*19mm	White	DC 24V	W2*4.6d	16 ± 2mA	(K)5000-6000	1.9lm	30K(h)	90°
LT5W-WF-04D	T5*19mm	White	DC 28V	W2*4.6d	17 ± 2mA	(K)5000-6000	2.0lm	30K(h)	90°

Precautions in handling

- 1.Blue, Green, and White products are so sensitive to ESD that user's require to handle with care.
- 2.Customer designs are acceptable on the Lamp's M.O.L (Max of Length) Viewing Angle and/or Wave Length.

Package (Box)

- Bulk..... 100 Pcs/Box
- Bulk..... 20 Box/M.Carton
- Bulk..... 5000 Pcs/Carton

Package (Anti-Static Bag)

- Bulk..... 100 Pcs/Bag
- Bulk..... 20 Bag/Box
- Bulk..... 4000 Pcs/Carton