

Type : **LC20E12-9L**

Characters:

Epoxy Lens Color: Water Clear.Frosted.

Color: Red. Green. Blue. Yellow. White.Warm White

Dia. & Length: **Base:**


C20*54mm.

E-12.E-14

Bulb Shape : **For:**

C20-9L

Indicator.Night Light.

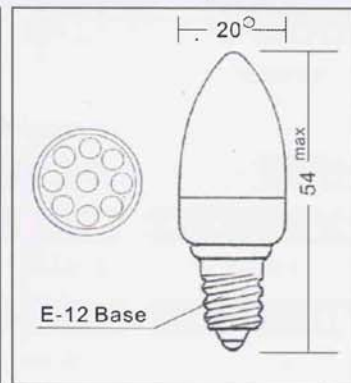

Part Number and Description

| Part Number | Diameter Length | Color | Volts | Base | Current (mA)±15% | Wave length(nm) | Lumens (lm)±20% | Life time(h) | Viewing Angle |
|------------------|-----------------|------------|---------|------|------------------|-----------------|-----------------|--------------|---------------|
| LC20E12-R9-02A | C20*54mm | Red | AC 12V | E-12 | 24mA | 620-630 | 3.9lm | 20K(h) | 160° |
| LC20E12-R9-03A | C20*54mm | Red | AC 24V | E-12 | 23mA | 620-630 | 3.8lm | 20K(h) | 160° |
| LC20E12-R9-08A4 | C20*54mm | Red | AC 110V | E-12 | 17mA | 620-630 | 3.5lm | 20K(h) | 160° |
| LC20E12-R9-09A3 | C20*54mm | Red | AC 230V | E-12 | 15mA | 620-630 | 3.4lm | 20K(h) | 160° |
| LC20E12-G9-02A | C20*54mm | Green | AC 12V | E-12 | 24mA | 515-525 | 10lm | 20K(h) | 160° |
| LC20E12-G9-03A | C20*54mm | Green | AC 24V | E-12 | 23mA | 515-525 | 9lm | 20K(h) | 160° |
| LC20E12-G9-08A4 | C20*54mm | Green | AC 110V | E-12 | 16mA | 515-525 | 8lm | 20K(h) | 160° |
| LC20E12-G9-09A3 | C20*54mm | Green | AC 230V | E-12 | 15mA | 515-525 | 7lm | 20K(h) | 160° |
| LC20E12-B9-02A | C20*54mm | Blue | AC 12V | E-12 | 24mA | 465-475 | 2.1lm | 20K(h) | 160° |
| LC20E12-B9-03A | C20*54mm | Blue | AC 24V | E-12 | 23mA | 465-475 | 2lm | 20K(h) | 160° |
| LC20E12-B9-08A4 | C20*54mm | Blue | AC 110V | E-12 | 16mA | 465-475 | 1.9lm | 20K(h) | 160° |
| LC20E12-B9-09A3 | C20*54mm | Blue | AC 230V | E-12 | 15mA | 465-475 | 1.9lm | 20K(h) | 160° |
| LC20E12-Y9-02A | C20*54mm | Yellow | AC 12V | E-12 | 24mA | 585-595 | 3.8lm | 20K(h) | 160° |
| LC20E12-Y9-03A | C20*54mm | Yellow | AC 24V | E-12 | 23mA | 585-595 | 3.8lm | 20K(h) | 160° |
| LC20E12-Y9-08A4 | C20*54mm | Yellow | AC 110V | E-12 | 17mA | 585-595 | 3.6lm | 20K(h) | 160° |
| LC20E12-Y9-09A3 | C20*54mm | Yellow | AC 230V | E-12 | 15mA | 585-595 | 3.4lm | 20K(h) | 160° |
| LC20E12-W9-02A | C20*54mm | White | AC 12V | E-12 | 24mA | (K) 5000-6000 | 12lm | 20K(h) | 160° |
| LC20E12-W9-03A | C20*54mm | White | AC 24V | E-12 | 23mA | (K) 5000-6000 | 11lm | 20K(h) | 160° |
| LC20E12-W9-08A4 | C20*54mm | White | AC 110V | E-12 | 17mA | (K) 5000-6000 | 10lm | 20K(h) | 160° |
| LC20E12-W9-09A3 | C20*54mm | White | AC 230V | E-12 | 15mA | (K) 5000-6000 | 9lm | 20K(h) | 160° |
| LC20E12-WW9-02A | C20*54mm | Warm white | AC 12V | E-12 | 24mA | (K) 2500-3000 | 10lm | 20K(h) | 160° |
| LC20E12-WW9-03A | C20*54mm | Warm white | AC 24V | E-12 | 23mA | (K) 2500-3000 | 9lm | 20K(h) | 160° |
| LC20E12-WW9-08A4 | C20*54mm | Warm white | AC 110V | E-12 | 17mA | (K) 2500-3000 | 8lm | 20K(h) | 160° |
| LC20E12-WW9-09A3 | C20*54mm | Warm white | AC 230V | E-12 | 15mA | (K) 2500-3000 | 6lm | 20K(h) | 160° |

Precautions in handling

1. Blue, Green, and White products are so sensitive to ESD that user's require to handle with care.
2. Customer designs are acceptable on the Lamp's M.O.L (Max of Length) Viewing Angle and/or Wave Length.

Package (Box)

- Bulk..... 10 Pcs/Box
 Bulk..... 15 Box/M.Carton
 Bulk..... 300 Pcs/Carton

Package (Industrial)