

Type : **L.T18.5BD-9L**


Characters:

Epoxy Lens Color:Water Clear.Frosted.

Color: Red. Green. Blue. Amber. White.

Dia. & Length: **Base:**
T18.5*35mm. BA15d

Bulb Shape : **For:**
9-LED. Auto.Coin machine.Aircraft.
Marine.Indicator.

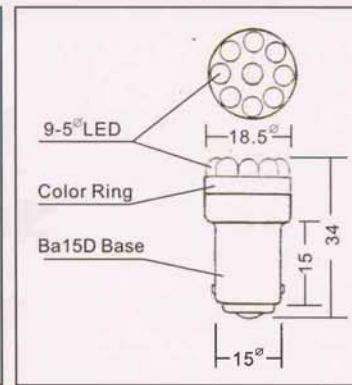

Part Number and Description

Part Number	Diameter Length	Color	Volts	Base	Design Current (mA)	Wave length(nm)	Lumens (M.c.d)	Life time(h)	Viewing Angle
LT18.5BD-9R-01D	T18.5*35mm	Red	DC 6V	BA15d	12/50	620-630	0.7/2.8	10K	120°
LT18.5BD-9R-02D	T18.5*35mm	Red	DC 12V	BA15d	10/49	620-630	0.6/2.7	10K	120°
LT18.5BD-9R-03D	T18.5*35mm	Red	DC 24V	BA15d	10/48	620-630	0.6/2.6	10K	120°
LT18.5BD-9R-04D	T18.5*35mm	Red	DC 28V	BA15d	11/49	620-630	0.7/2.7	10K	120°
LT18.5BD-9R-05D	T18.5*35mm	Red	DC 45V	BA15d	10/47	620-630	0.6/2.6	10K	120°
LT18.5BD-9G-01D	T18.5*35mm	Green	DC 6V	BA15d	26/52	515-525	6/10	10K	120°
LT18.5BD-9G-02D	T18.5*35mm	Green	DC 12V	BA15d	26/53	515-525	6/11	10K	120°
LT18.5BD-9G-03D	T18.5*35mm	Green	DC 24V	BA15d	23/50	515-525	6/10	10K	120°
LT18.5BD-9G-04D	T18.5*35mm	Green	DC 28V	BA15d	22/48	515-525	5/9	10K	120°
LT18.5BD-9G-05D	T18.5*35mm	Green	DC 45V	BA15d	21/46	515-525	5/8	10K	120°
LT18.5BD-9B-01D	T18.5*35mm	Blue	DC 6V	BA15d	8.6/41	465-475	0.8/3.6	10K	120°
LT18.5BD-9B-02D	T18.5*35mm	Blue	DC 12V	BA15d	8.8/42	465-475	1.0/3.8	10K	120°
LT18.5BD-9B-03D	T18.5*35mm	Blue	DC 24V	BA15d	8.8/43	465-475	1.0/3.8	10K	120°
LT18.5BD-9B-04D	T18.5*35mm	Blue	DC 28V	BA15d	9/45	465-475	1.1/3.9	10K	120°
LT18.5BD-9B-05D	T18.5*35mm	Blue	DC 45V	BA15d	8.5/40	465-475	0.9/3.6	10K	120°
LT18.5BD-9A-01D	T18.5*35mm	Amber	DC 6V	BA15d	23/48	590-600	0.9/3.5	10K	120°
LT18.5BD-9A-02D	T18.5*35mm	Amber	DC 12V	BA15d	25/50	590-600	2/3.6	10K	120°
LT18.5BD-9A-03D	T18.5*35mm	Amber	DC 24V	BA15d	23/48	590-600	2/3.5	10K	120°
LT18.5BD-9A-04D	T18.5*35mm	Amber	DC 28V	BA15d	25/50	590-600	2/3.6	10K	120°
LT18.5BD-9A-05D	T18.5*35mm	Amber	DC 45V	BA15d	22/47	590-600	1.8/3.5	10K	120°
LT18.5BD-9W-01D	T18.5*35mm	White	DC 6V	BA15d	26/58	(K)5000-6000	7/11	10K	120°
LT18.5BD-9W-02D	T18.5*35mm	White	DC 12V	BA15d	28/60	(K)5000-6000	8/12	10K	120°
LT18.5BD-9W-03D	T18.5*35mm	White	DC 24V	BA15d	26/58	(K)5000-6000	7/11	10K	120°
LT18.5BD-9W-04D	T18.5*35mm	White	DC 28V	BA15d	28/60	(K)5000-6000	8/12	10K	120°
LT18.5BD-9W-05D	T18.5*35mm	White	DC 45V	BA15d	25/55	(K)5000-6000	6/10	10K	120°

Precautions in handling

1. When soldering, leave 2.0mm of minimum clearance between the resin and the soldering point.
2. Blue, Green and White products are so sensitive to ESD, that users required to handle with care.
3. Customer's Design are Acceptable whatever on the Lamp's M.O.L. (Max. Of Length), Viewing Angle or Wave Length.

Package

- Bulk..... 10 Pcs/Box
- Bulk..... 150 Pcs/15Box
- Bulk..... 300 Pcs/Carton