

Type: **LT20E12-9L**

**Characters:**

Epoxy Lens Color: Water Clear. Frosted.

**Color:** Red. Green. Blue. Yellow. White.

**Dia. & Length:**

T20\*46mm.

**Base:**


E-12.E-14.BA15d

**Bulb Shape :**

T20-9L

**For:**

Indicator.Night Light.

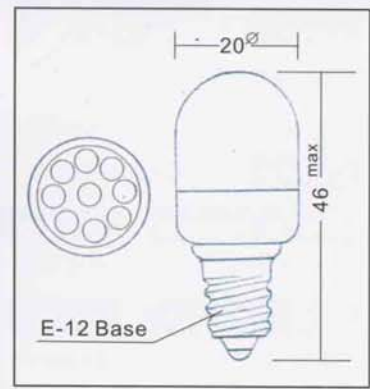

## Part Number and Description

Part Number	Diameter Length	Color	Volts	Base	Current (mA)±15%	Wave length(nm)	Lumens (lm)±20%	Life time(h)	Viewing Angle
LT20E12-R9-02A	T20*46mm	Red	AC 12V	E-12	24mA	620-630	3.6lm	20K(h)	160°
LT20E12-R9-03A	T20*46mm	Red	AC 24V	E-12	26mA	620-630	3.8lm	20K(h)	160°
LT20E12-R9-08A4	T20*46mm	Red	AC 110V	E-12	17mA	620-630	3.9lm	20K(h)	160°
LT20E12-R9-09A3	T20*46mm	Red	AC 230V	E-12	15mA	620-630	3.9lm	20K(h)	160°
LT20E12-G9-02A	T20*46mm	Green	AC 12V	E-12	24mA	515-525	7lm	20K(h)	160°
LT20E12-G9-03A	T20*46mm	Green	AC 24V	E-12	26mA	515-525	7lm	20K(h)	160°
LT20E12-G9-08A4	T20*46mm	Green	AC 110V	E-12	16mA	515-525	7.5lm	20K(h)	160°
LT20E12-G9-09A3	T20*46mm	Green	AC 230V	E-12	15mA	515-525	7lm	20K(h)	160°
LT20E12-B9-02A	T20*46mm	Blue	AC 12V	E-12	24mA	465-475	2lm	20K(h)	160°
LT20E12-B9-03A	T20*46mm	Blue	AC 24V	E-12	26mA	465-475	2lm	20K(h)	160°
LT20E12-B9-08A4	T20*46mm	Blue	AC 110V	E-12	16mA	465-475	2.1lm	20K(h)	160°
LT20E12-B9-09A3	T20*46mm	Blue	AC 230V	E-12	15mA	465-475	1.9lm	20K(h)	160°
LT20E12-Y9-02A	T20*46mm	Yellow	AC 12V	E-12	24mA	585-595	3.6lm	20K(h)	160°
LT20E12-Y9-03A	T20*46mm	Yellow	AC 24V	E-12	26mA	585-595	3.8lm	20K(h)	160°
LT20E12-Y9-08A4	T20*46mm	Yellow	AC 110V	E-12	17mA	585-595	3.6lm	20K(h)	160°
LT20E12-Y9-09A3	T20*46mm	Yellow	AC 230V	E-12	15mA	585-595	3.6lm	20K(h)	160°
LT20E12-W9-02A	T20*46mm	White	AC 12V	E-12	15mA	(K)5000-6000	10lm	20K(h)	160°
LT20E12-W9-03A	T20*46mm	White	AC 24V	E-12	24mA	(K)5000-6000	10lm	20K(h)	160°
LT20E12-W9-08A4	T20*46mm	White	AC 110V	E-12	15mA	(K)5000-6000	11lm	20K(h)	160°
LT20E12-W9-09A3	T20*46mm	White	AC 230V	E-12	15mA	(K)5000-6000	11lm	20K(h)	160°
LT20E-WW9-02A	T20*46mm	Warm white	AC 12V	E-12	24mA	(K)2500-3000	10lm	20K(h)	160°
LT20E-WW9-03A	T20*46mm	Warm white	AC 24V	E-12	23mA	(K)2500-3000	9lm	20K(h)	160°
LT20E-WW9-08A4	T20*46mm	Warm white	AC 110V	E-12	17mA	(K)2500-3000	8lm	20K(h)	160°
LT20W-WW9-09A3	T20*46mm	Warm white	AC 230V	E-12	15mA	(K)2500-3000	6lm	20K(h)	160°

### Precautions in handling

1. Blue, Green, and White products are so sensitive to ESD that user's require to handle with care.
2. Customer designs are acceptable on the Lamp's M.O.L (Max of Length) Viewing Angle and/or Wave Length.

### Package (Box)

- Bulk..... 10 Pcs/Box
- Bulk..... 15 Box/M. Carton
- Bulk..... 300 Pcs/ Carton

### Package (Industrial)